

MAINTENANCE BYPASS FOR MICRO-UPS SYSTEMS



When your computer system can't be without power — even for maintenance — a Liebert MicroPOD ensures continuous uptime. The MicroPOD provides maintenance bypass capability as well as power output distribution, and can be used with virtually any micro-UPS system.

The MicroPOD allows you to manually transfer your connected equipment to utility power via a maintenance bypass switch, permitting scheduled maintenance or UPS replacement without power disruption. Transferring back to UPS power is just as easy — just turn the switch to the indicated position and your load is protected by the UPS.

Available in plug and play or hard wired options at 120V or 208V rating. Includes brackets for rack mounting in any direction.

Use of the MicroPOD offers these benefits:

- Provides utility power to your attached equipment when switched to maintenance bypass mode
- Allows UPS maintenance or replacement of the UPS without discontinuing power to critical equipment
- Easily installed — the UPS and utility power are both connected to the MicroPOD with the supplied cords
- Rotary switch and LED indicators make the unit simple to operate




Specifications

Part Number	Plug to Utility	Receptacle to UPS Input	Plug to UPS Output	Micro POD Output Receptacles
120V UL Listed MicroPODs				
MP2-115A	5-15P	5-15R	5-15P	(8)5-15R
MP2-120C	5-20P	5-20R	5-20P	(8)5-20R (T-Slot)
MP2-130C	L5-30P	L5-30R	L5-30P	(8)5-20R (T-Slot)
MP2-130E	L5-30P	L5-30R	L5-30P	(2)5-15R, (4) 5-20R (T-Slot) (1) L5-30R
MP2-130P	L5-30P	L5-30R	L5-30P	(4) 5-15R, (2) L5-20R
MP2-115HW	Hardwired	5-15R	5-15P	Hardwired
MP2-120HW	Hardwired	5-20R	5-20P	Hardwired
MP2-130HW	Hardwired	5-30R	5-30P	Hardwired
MP2-220N	L6-20P OR Hardwire Connection (plug is removable for hardwire applications)	L6-20R	L6-20P	(2) L6-20R, (2) L6-15R, OR Hardwire Connections (receptacles are removable for hardwire applications)
230V CE Marked MicroPODs				
MP2-210K	EN60320/C14	EN60320/C13	EN60320/C14	(4) EN 60320/C13
MP2-220L	EN60320/C20	EN60320/C19	EN60320/C20	(4) EN60320/C13, (1)EN60320/C19

Configuration

The MicroPOD plugs into the utility and UPS, and the UPS is plugged into the MicroPOD. All protected devices are connected to the MicroPOD, allowing maintenance bypass for the UPS.

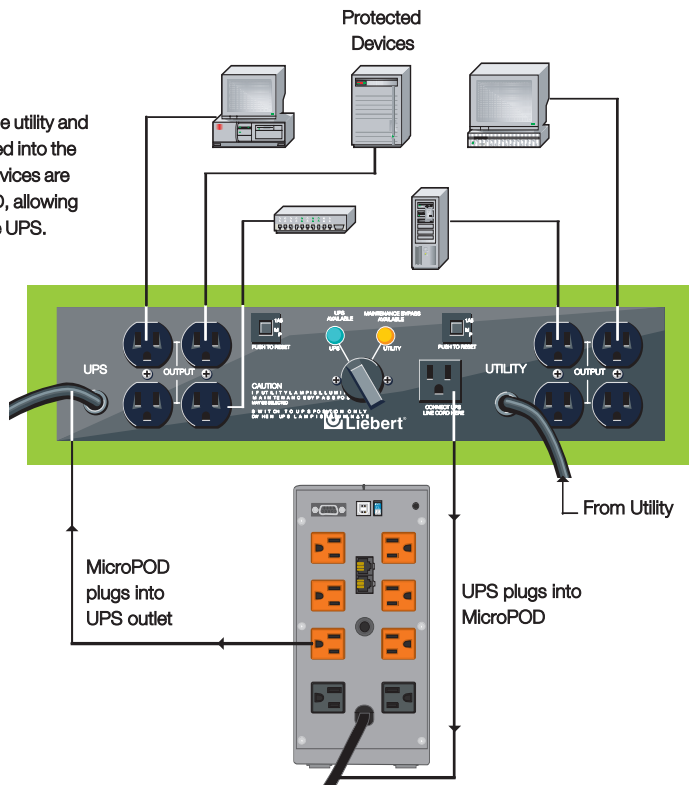

While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

© 2004 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice.

All names referred to are trademarks or registered trademarks of their respective owners.

© Liebert and the Liebert logo are registered trademarks of the Liebert Corporation.

© Keeping Business in Business is a registered trademark of the Liebert Corporation.

The Emerson logo is a trademark and service mark of Emerson Electric Co.

SL-23800 (9/04)
Printed in USA



1300 662 435
poweronaustralia.com.au

Power On Australia Pty Ltd - ABN 48 110 752 442

Unit 20, 256-258 Musgrave Road, Coopers Plains QLD 4108 (Head Office)

Po Box 5322, Daisy Hill QLD 4127