




Eaton 5PX 1500 for Pf= 0,7 loads (100% = 1500 VA / 1050 W)

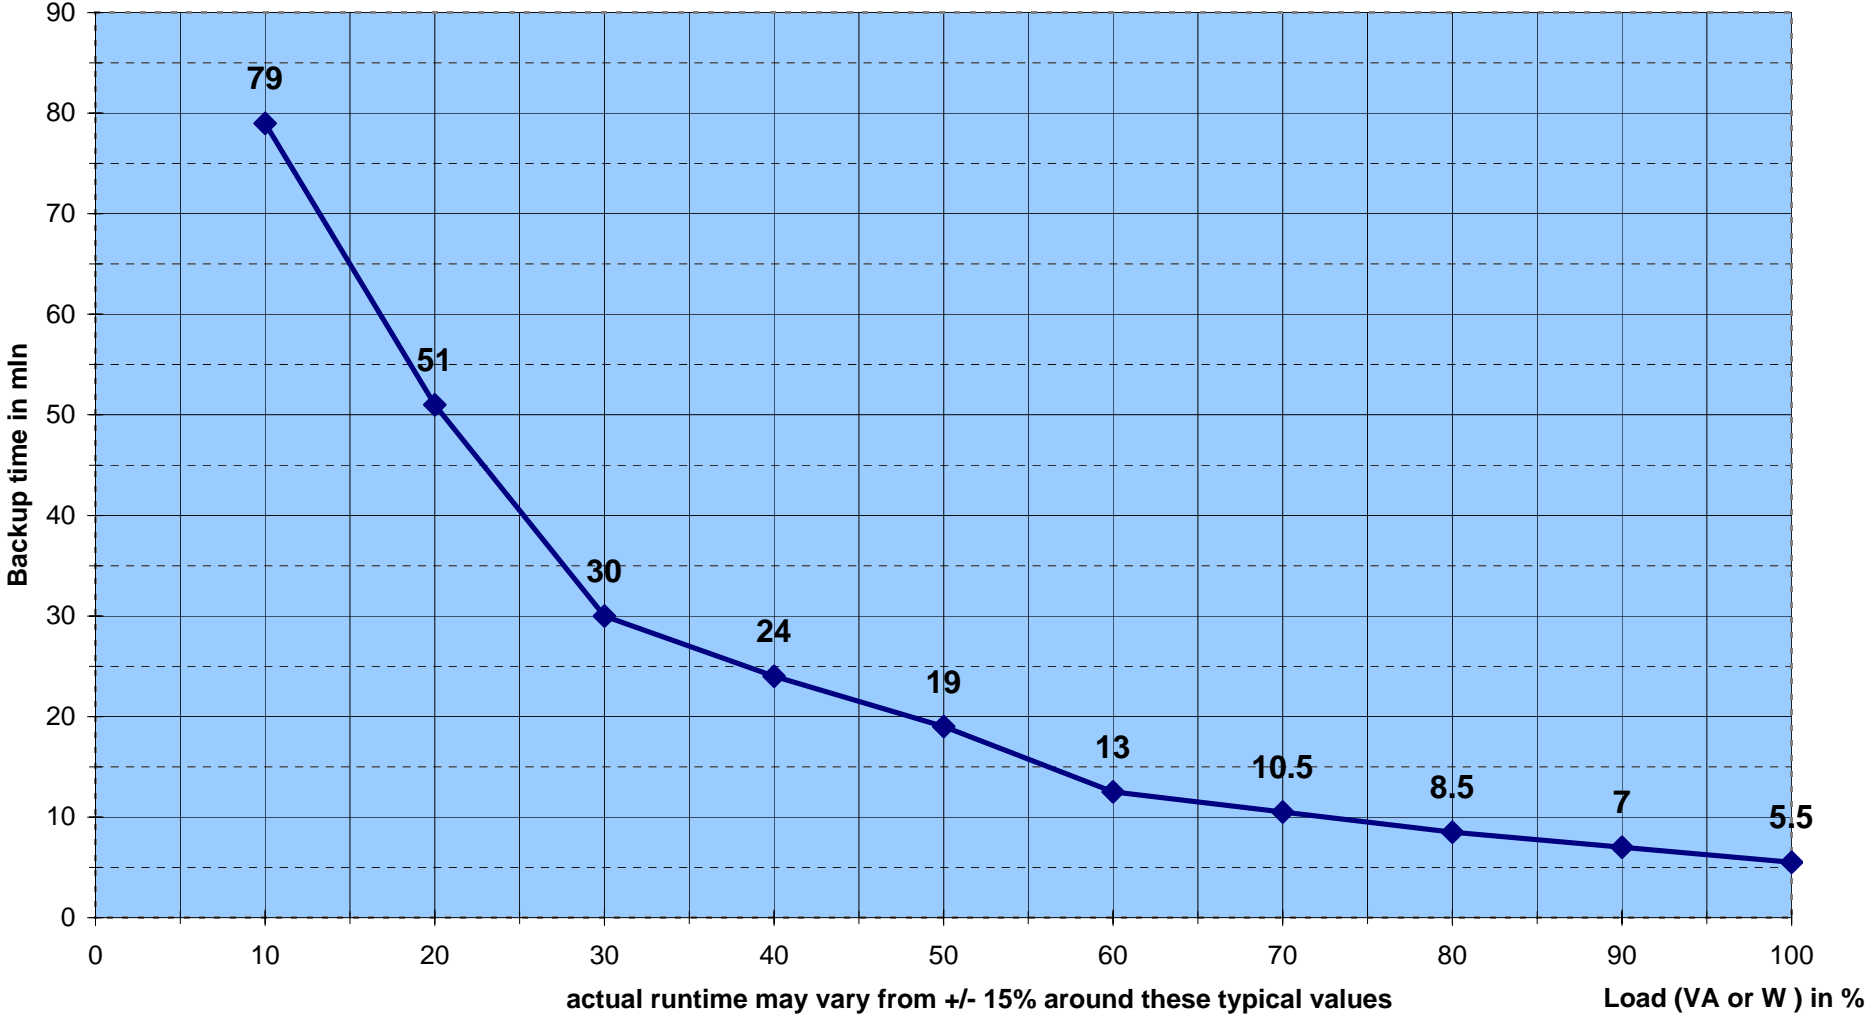

### Eaton 5PX 1500 + EBM for Pf= 0,7 loads (100% = 1500 VA / 1050 W)

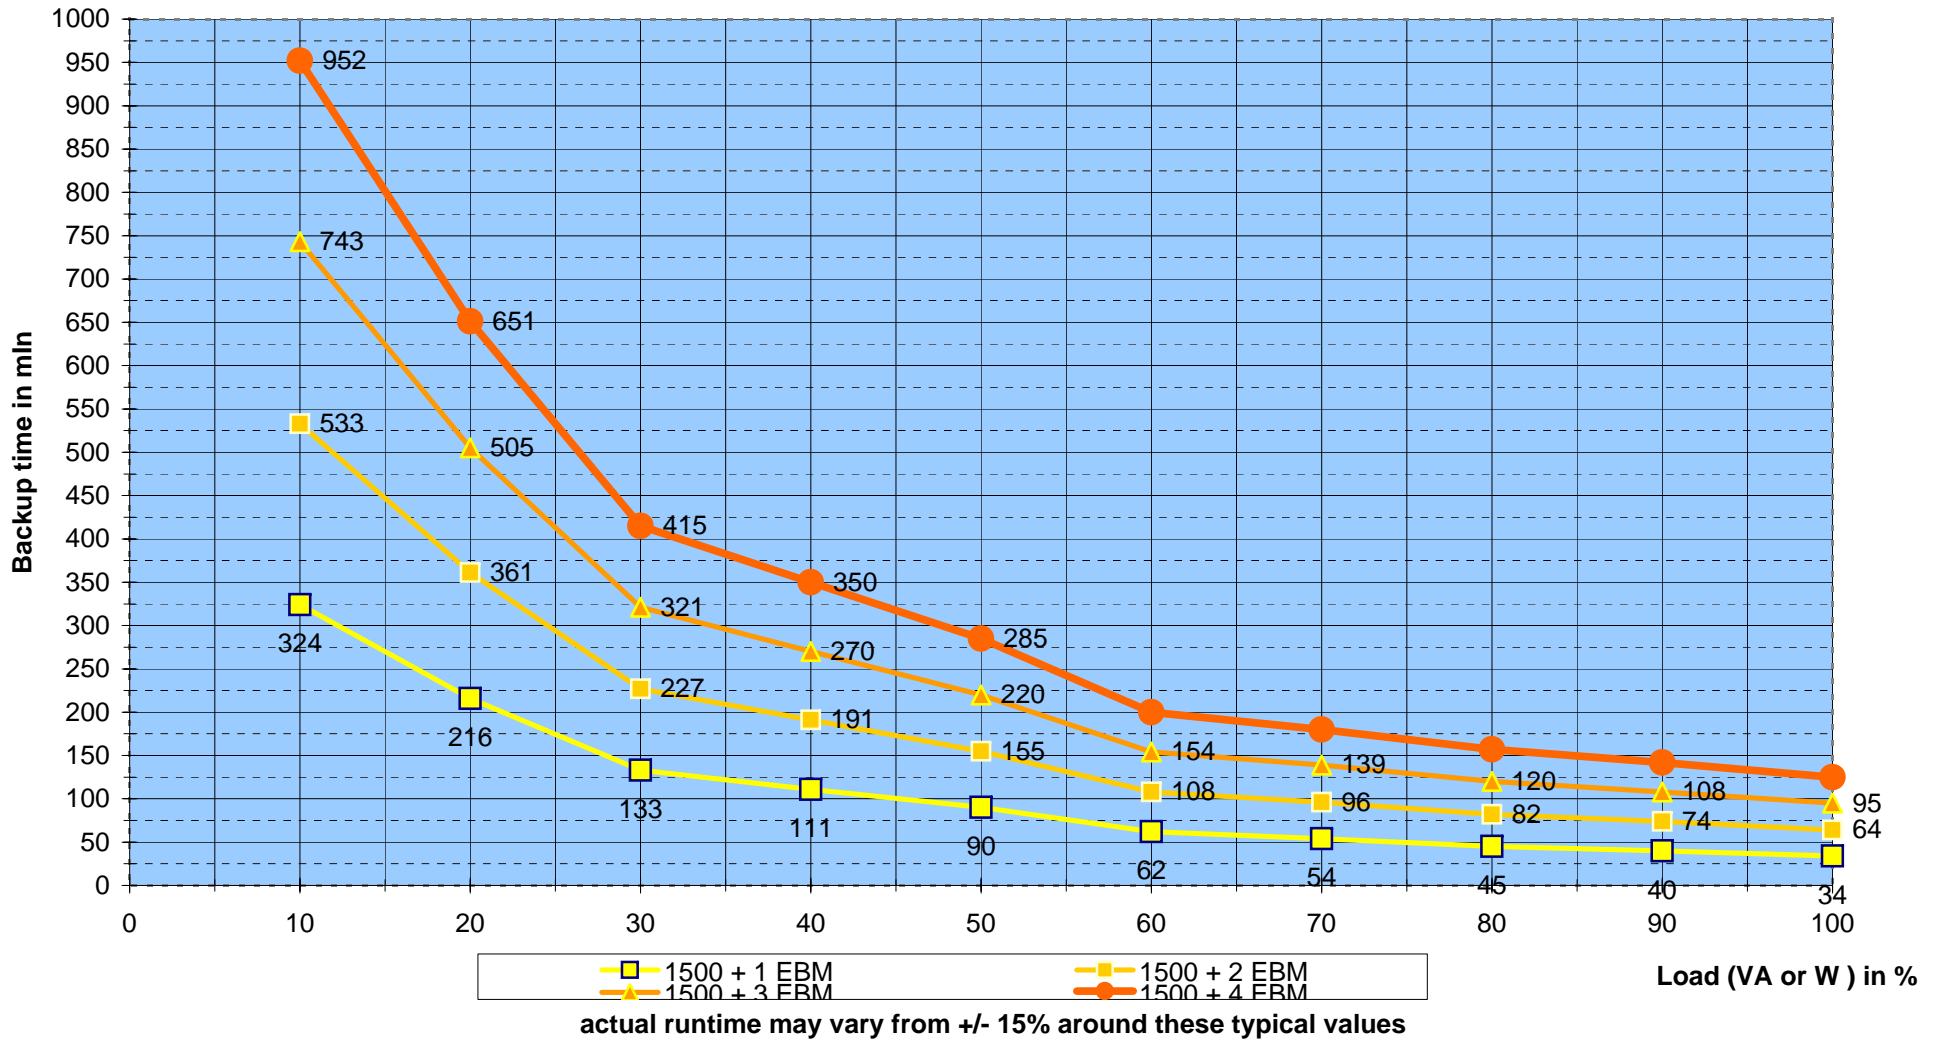


**Eaton 5PX 2000 for Pf= 0,7 loads (100% = 2000 VA / 1400 W)**

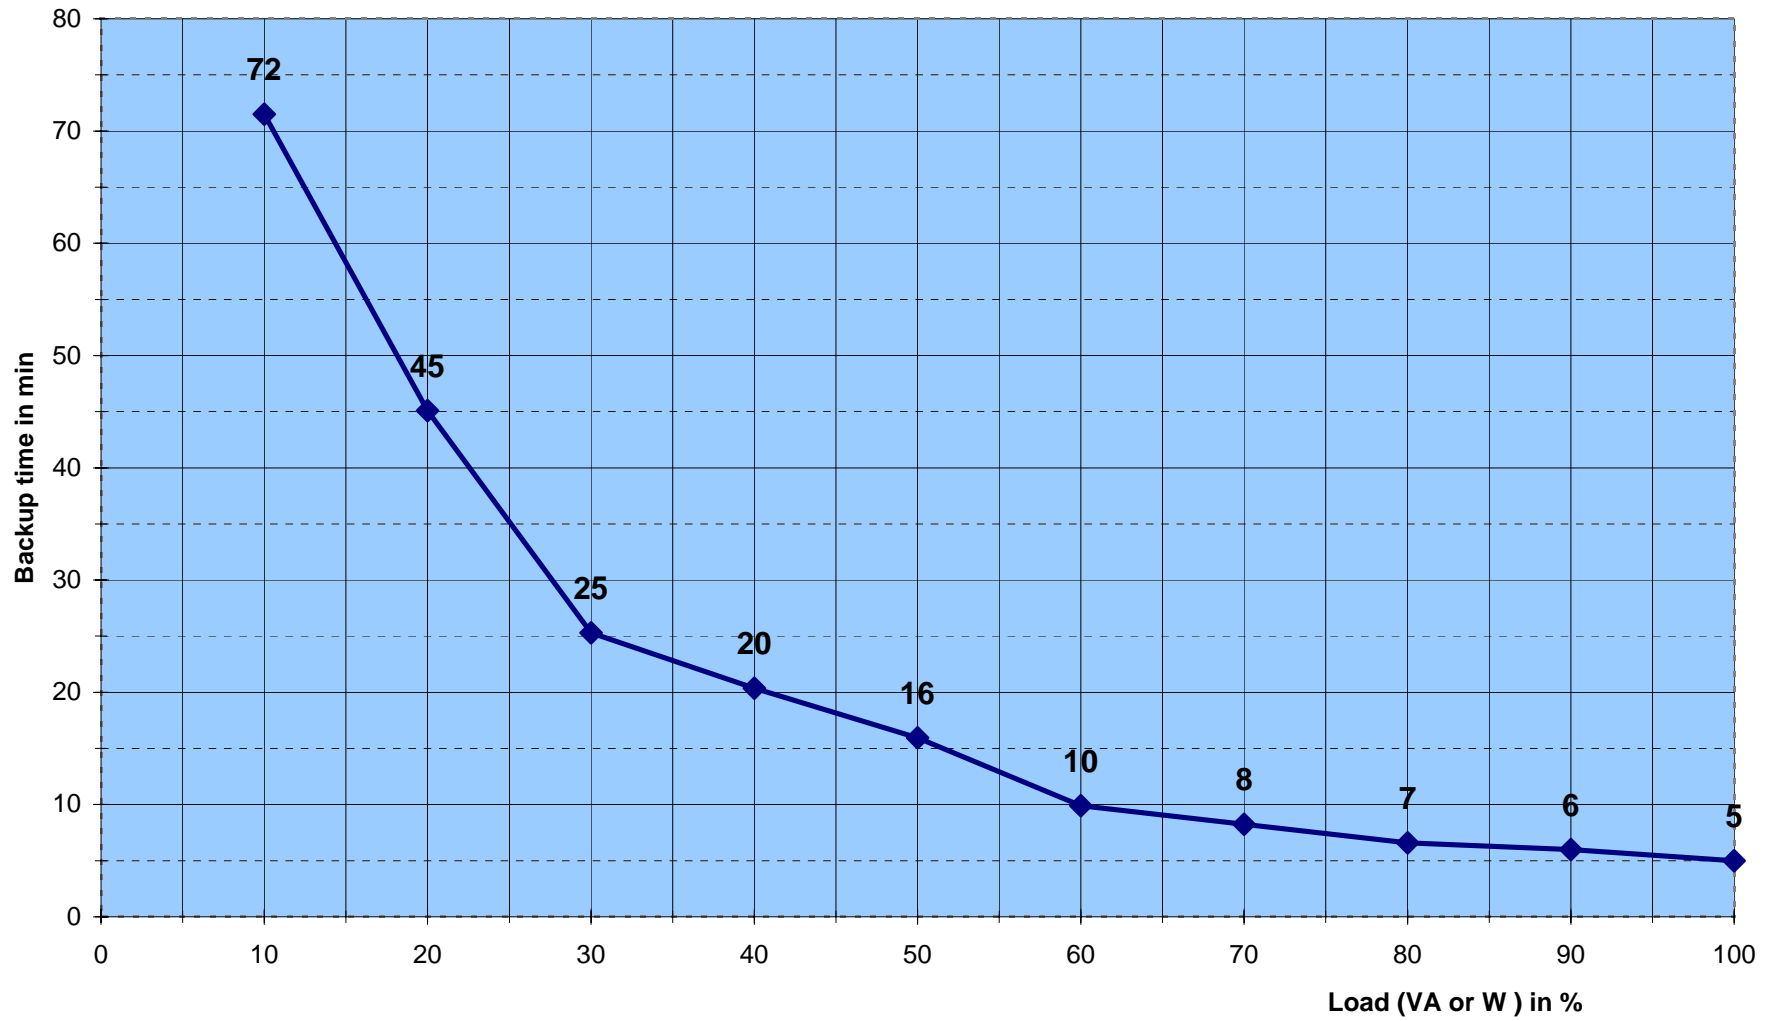


actual runtime may vary from +/- 15% around these typical values

Eaton 5PX 2000 + EBM for Pf= 0,7 loads (100% = 2000 VA / 1800 W)

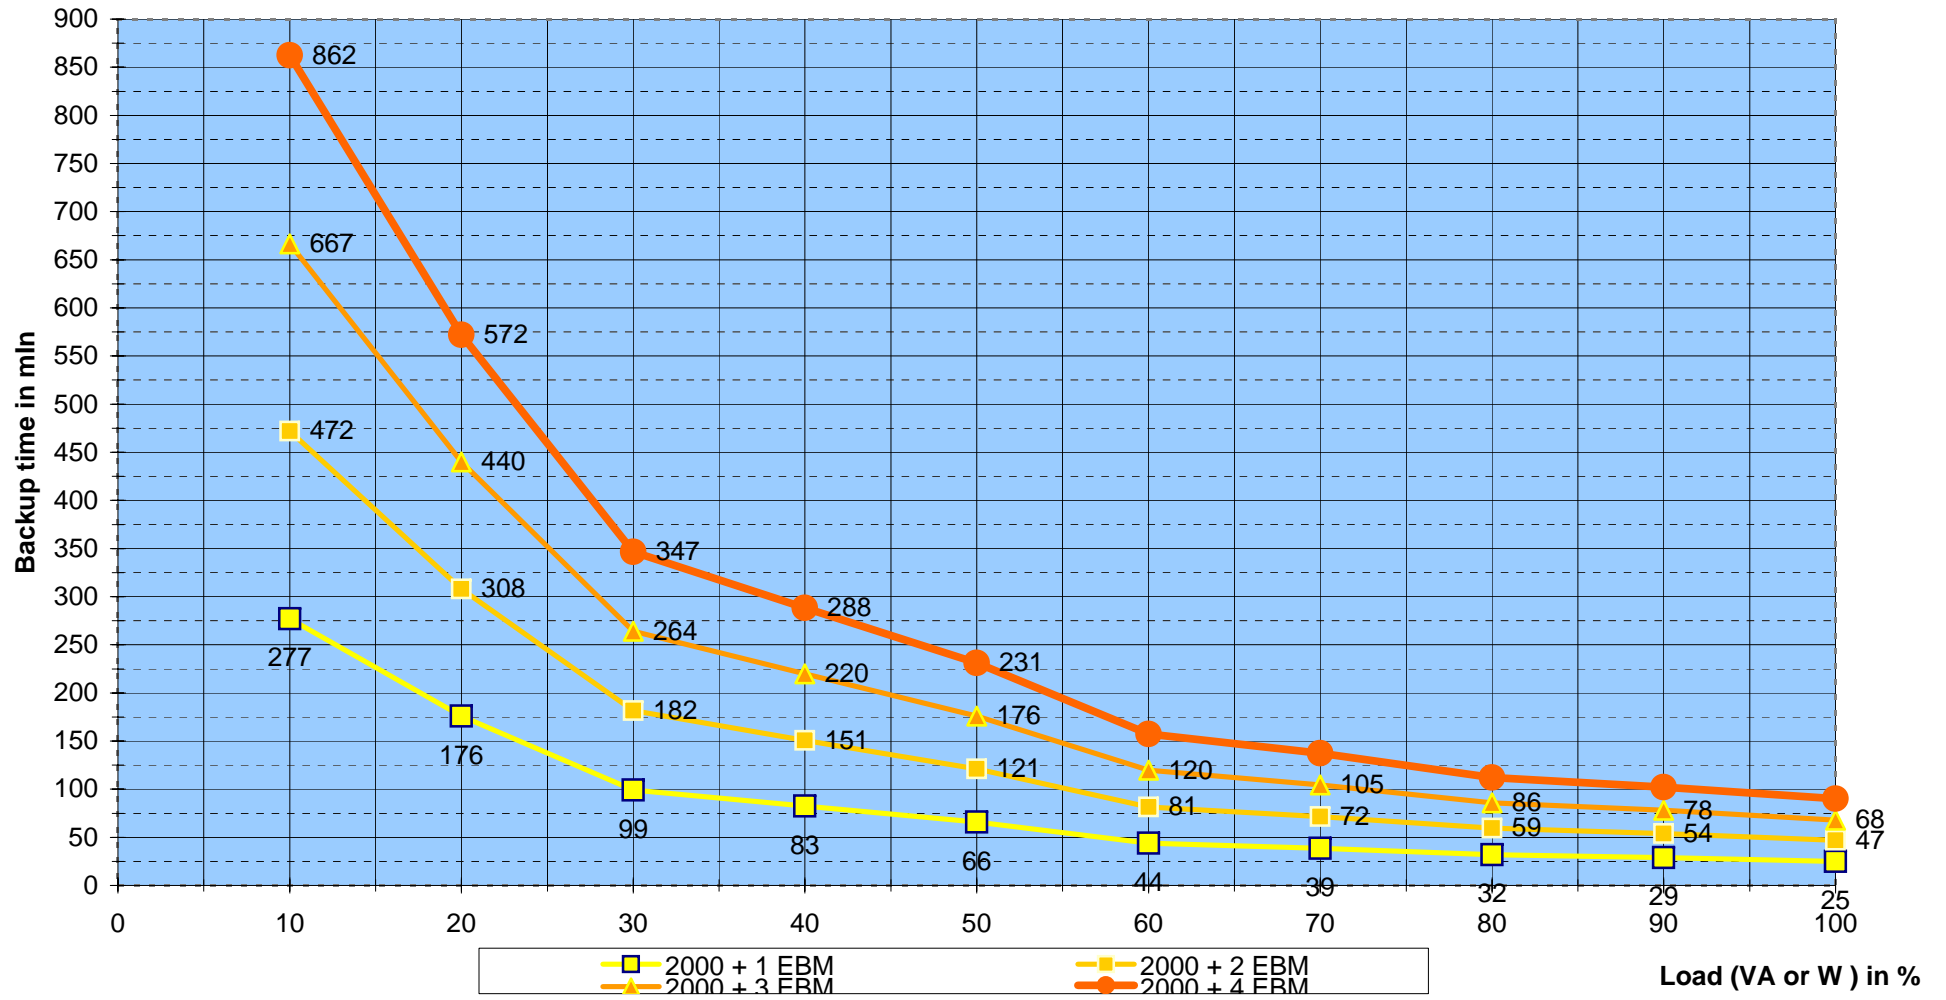

actual runtime may vary from +/- 15% around these typical values


Eaton 5PX 2200 for Pf= 0,7 loads (100% = 2200 VA / 1540 W)

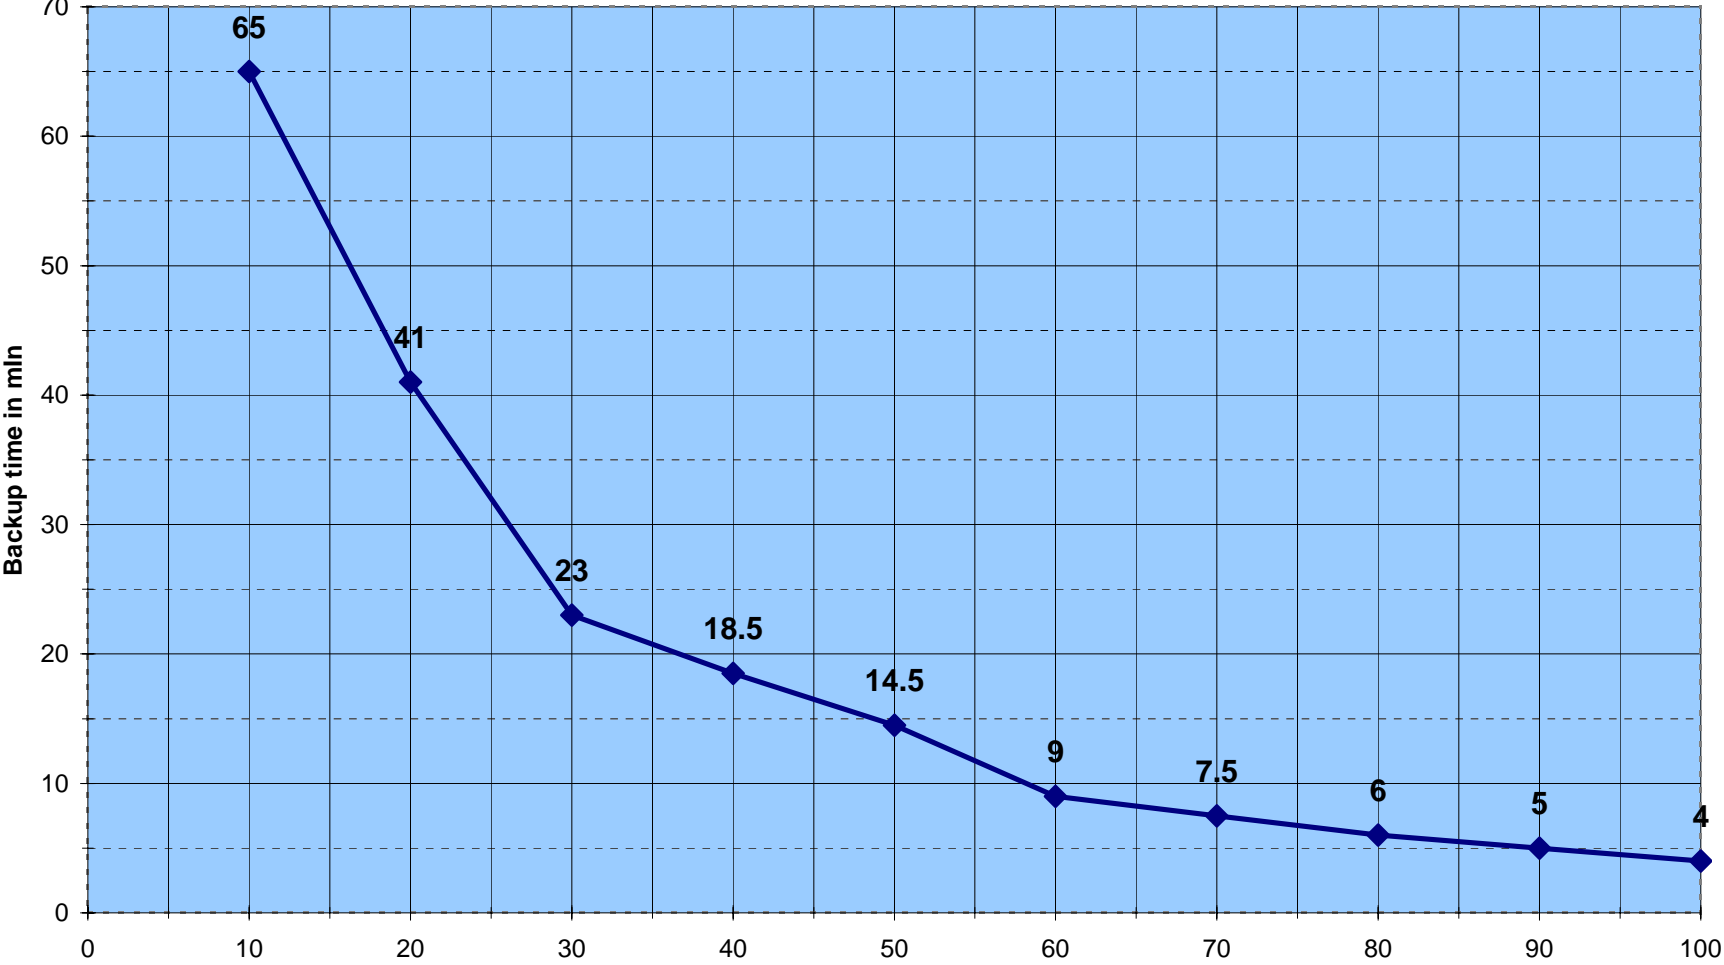

actual runtime may vary from +/- 15% around these typical values


Load (VA or W ) in %

### Eaton 5PX 2200 + EBM for Pf= 0,7 loads (100% = 2200 VA / 1540 W)

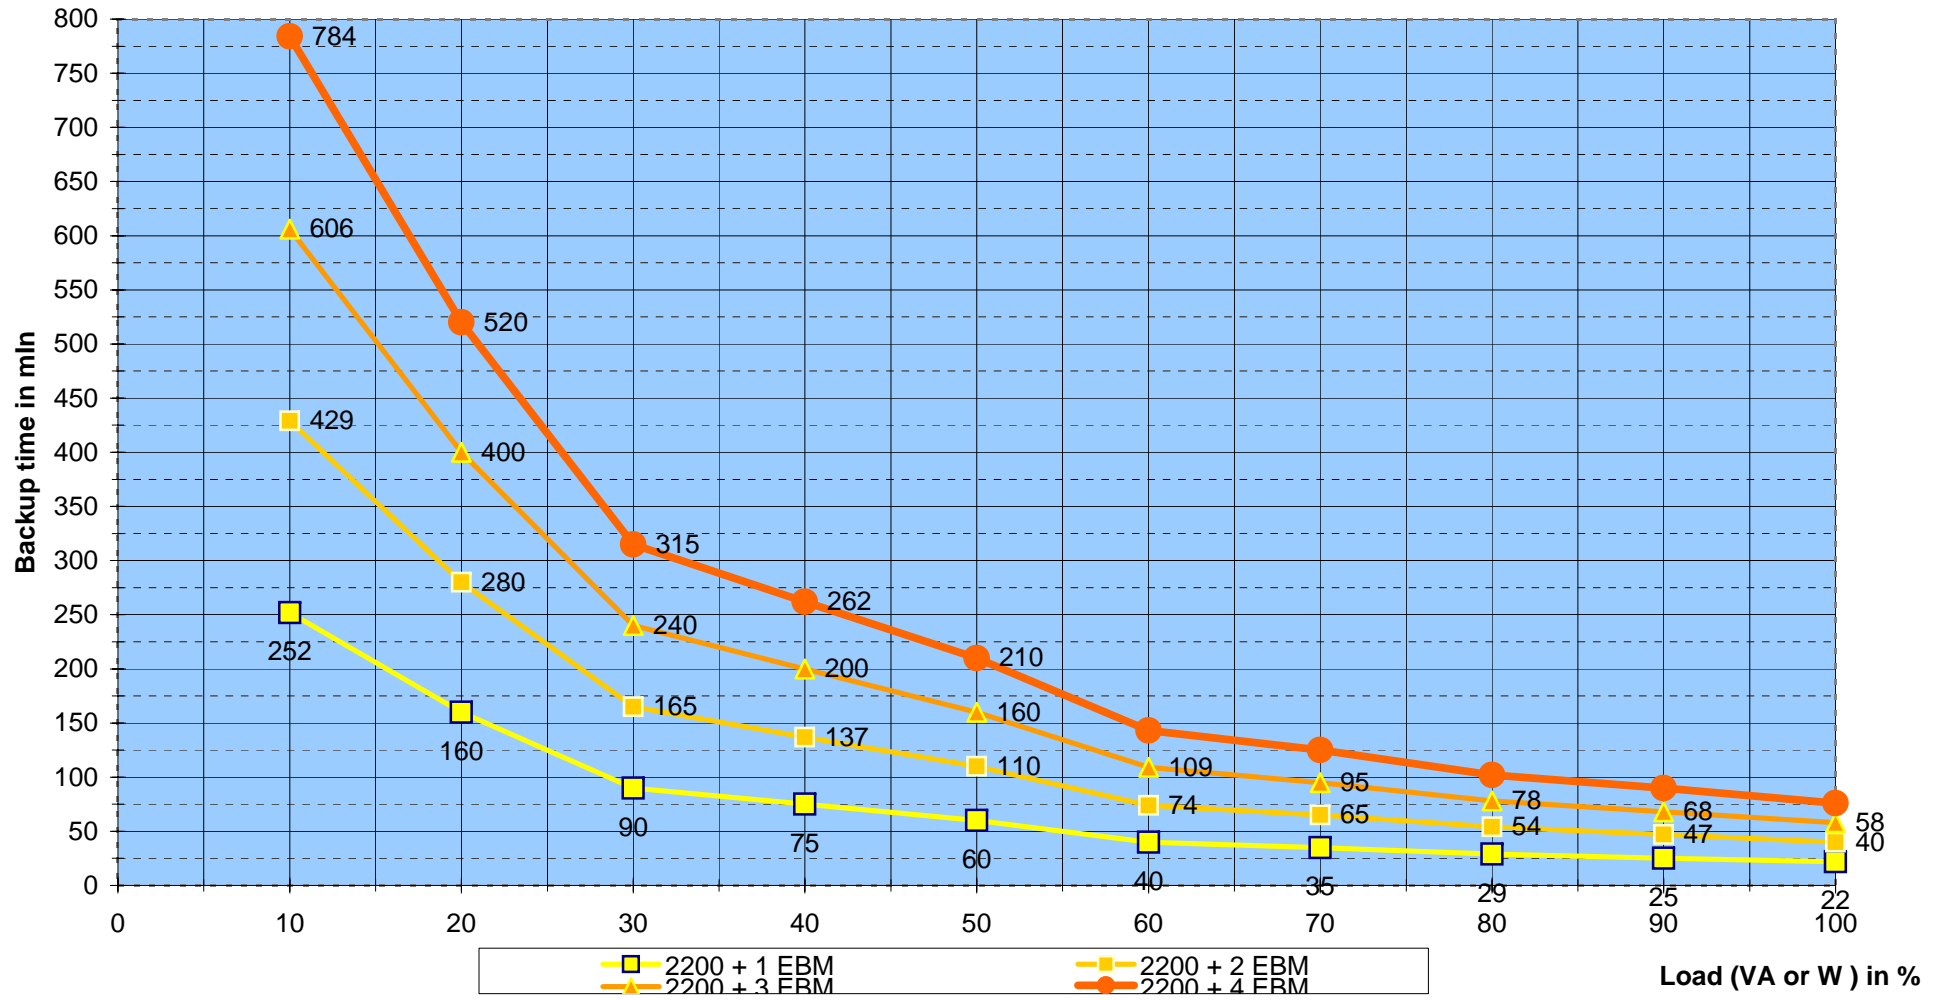


actual runtime may vary from +/- 15% around these typical values

Eaton 5PX 3000 for Pf= 0,7 loads (100% = 3000 VA / 2100 W)

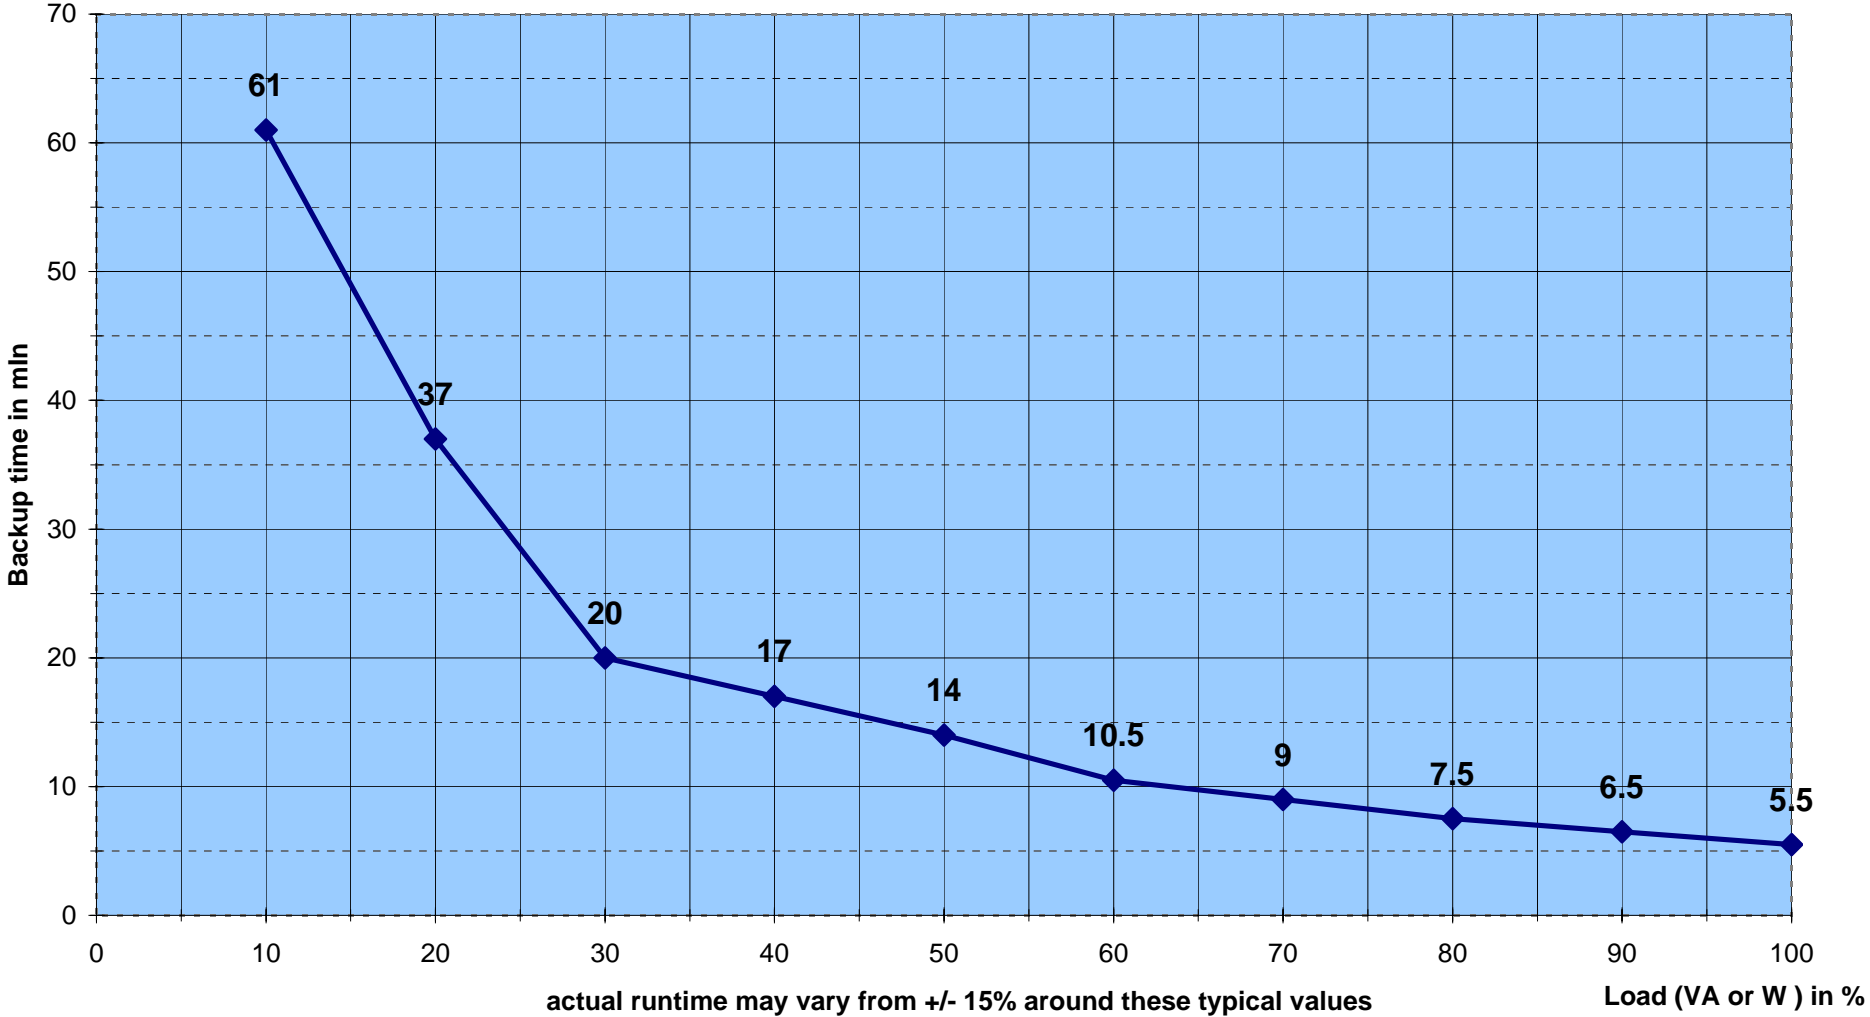


Eaton 5PX 3000 + EBM for Pf= 0,7 loads (100% = 3000 VA / 2100 W)

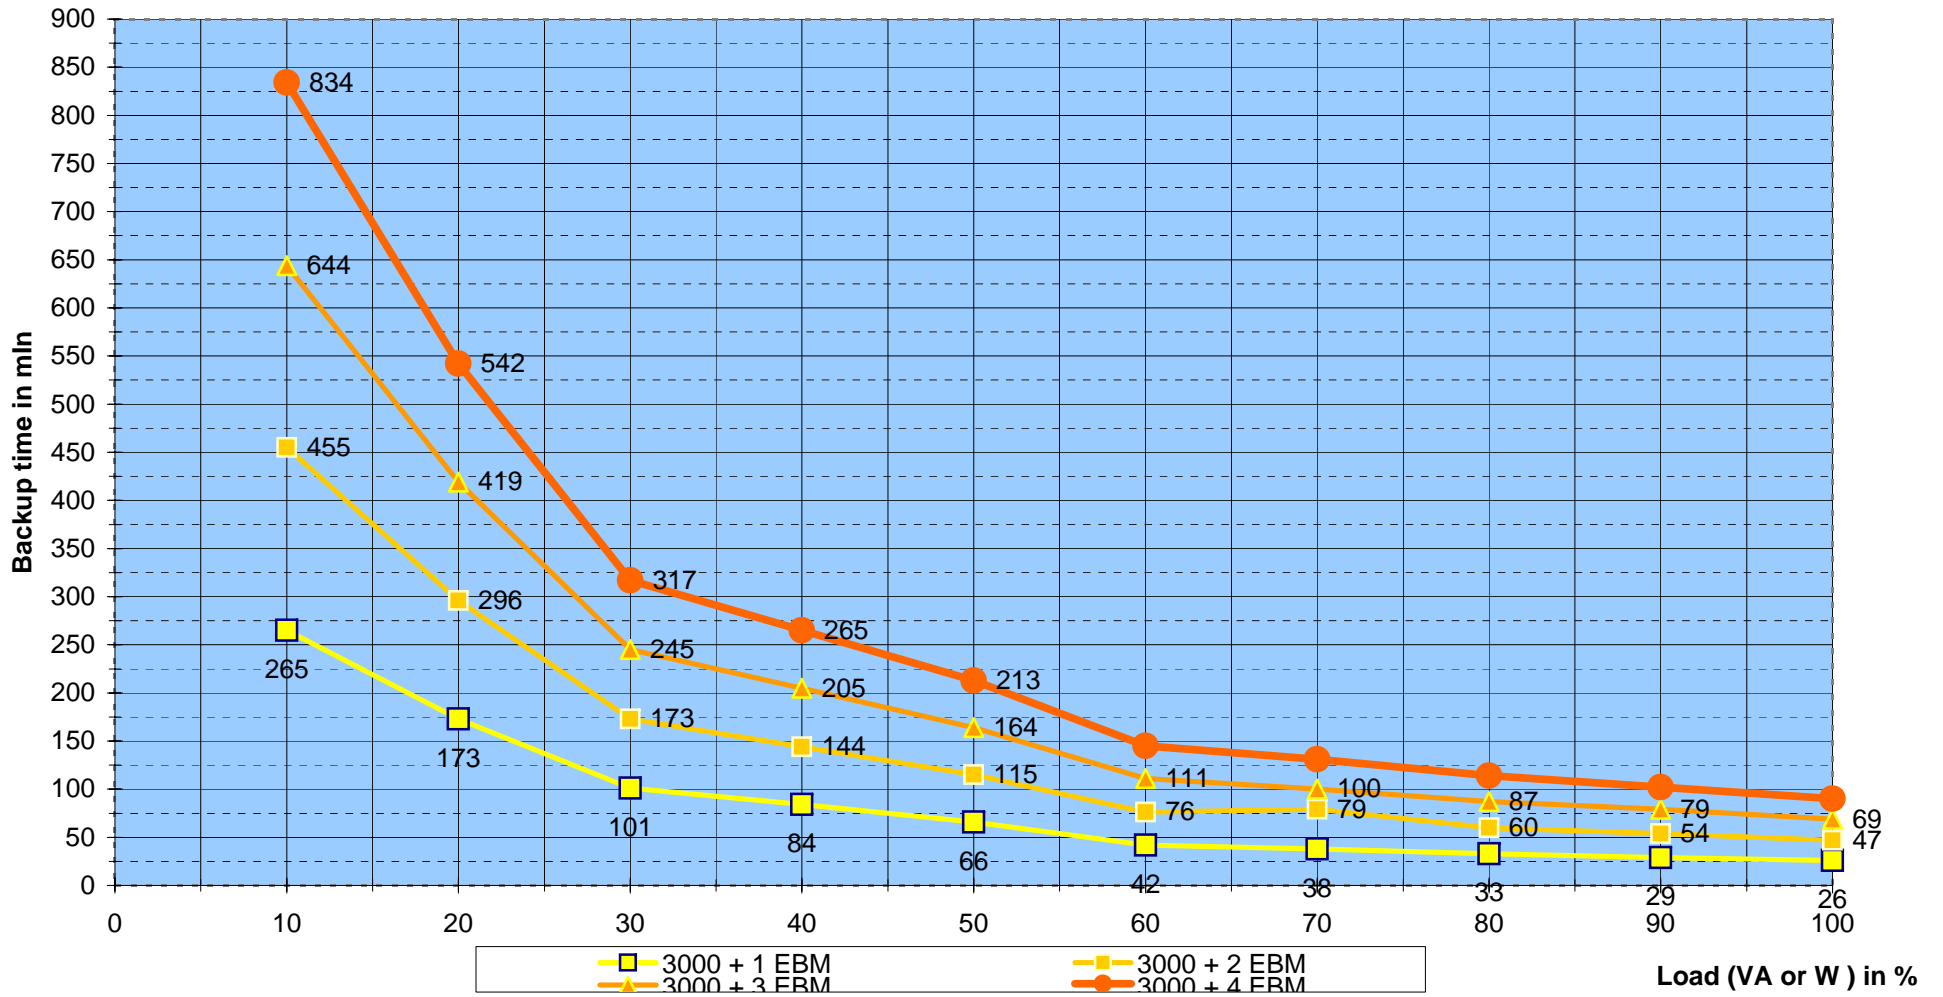


actual runtime may vary from +/- 15% around these typical values



Eaton 5PX 1500 for Pf= 0,9 loads (100% = 1500 VA / 1350 W)

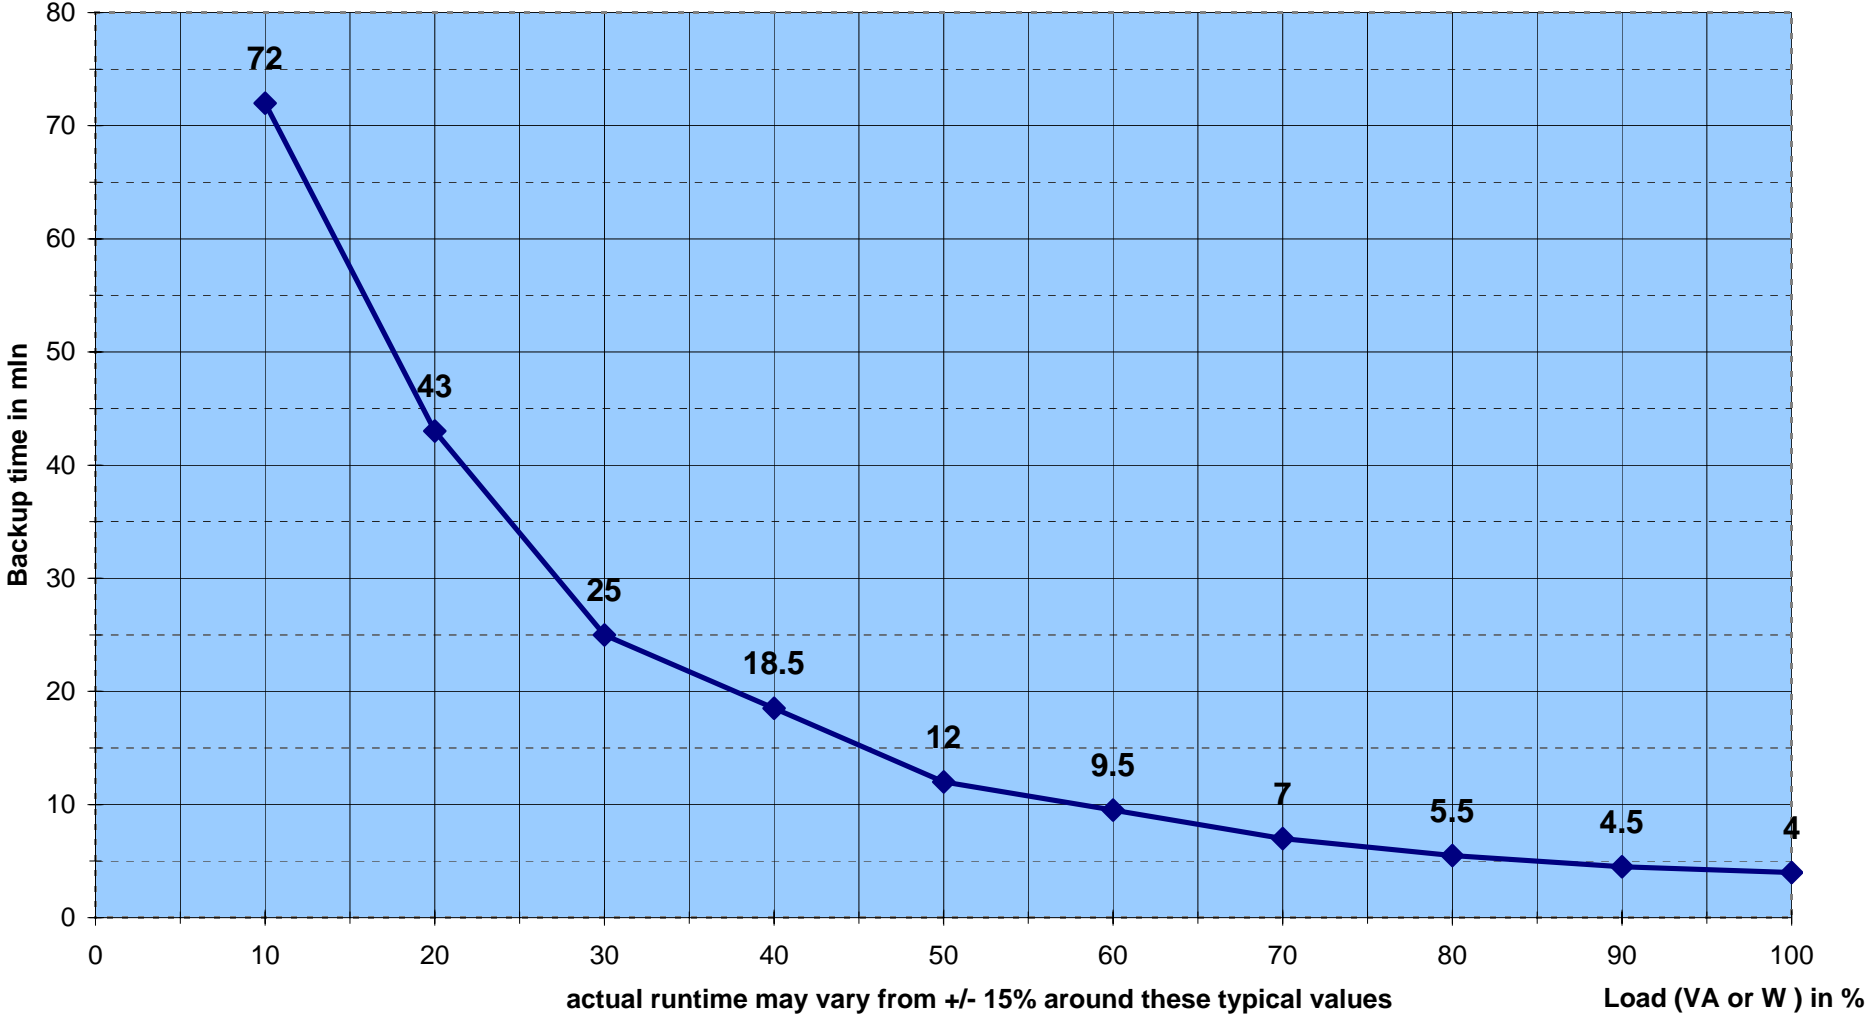


### Eaton 5PX 1500 + EBM for Pf= 0,9 loads (100% = 1500 VA / 1350 W)

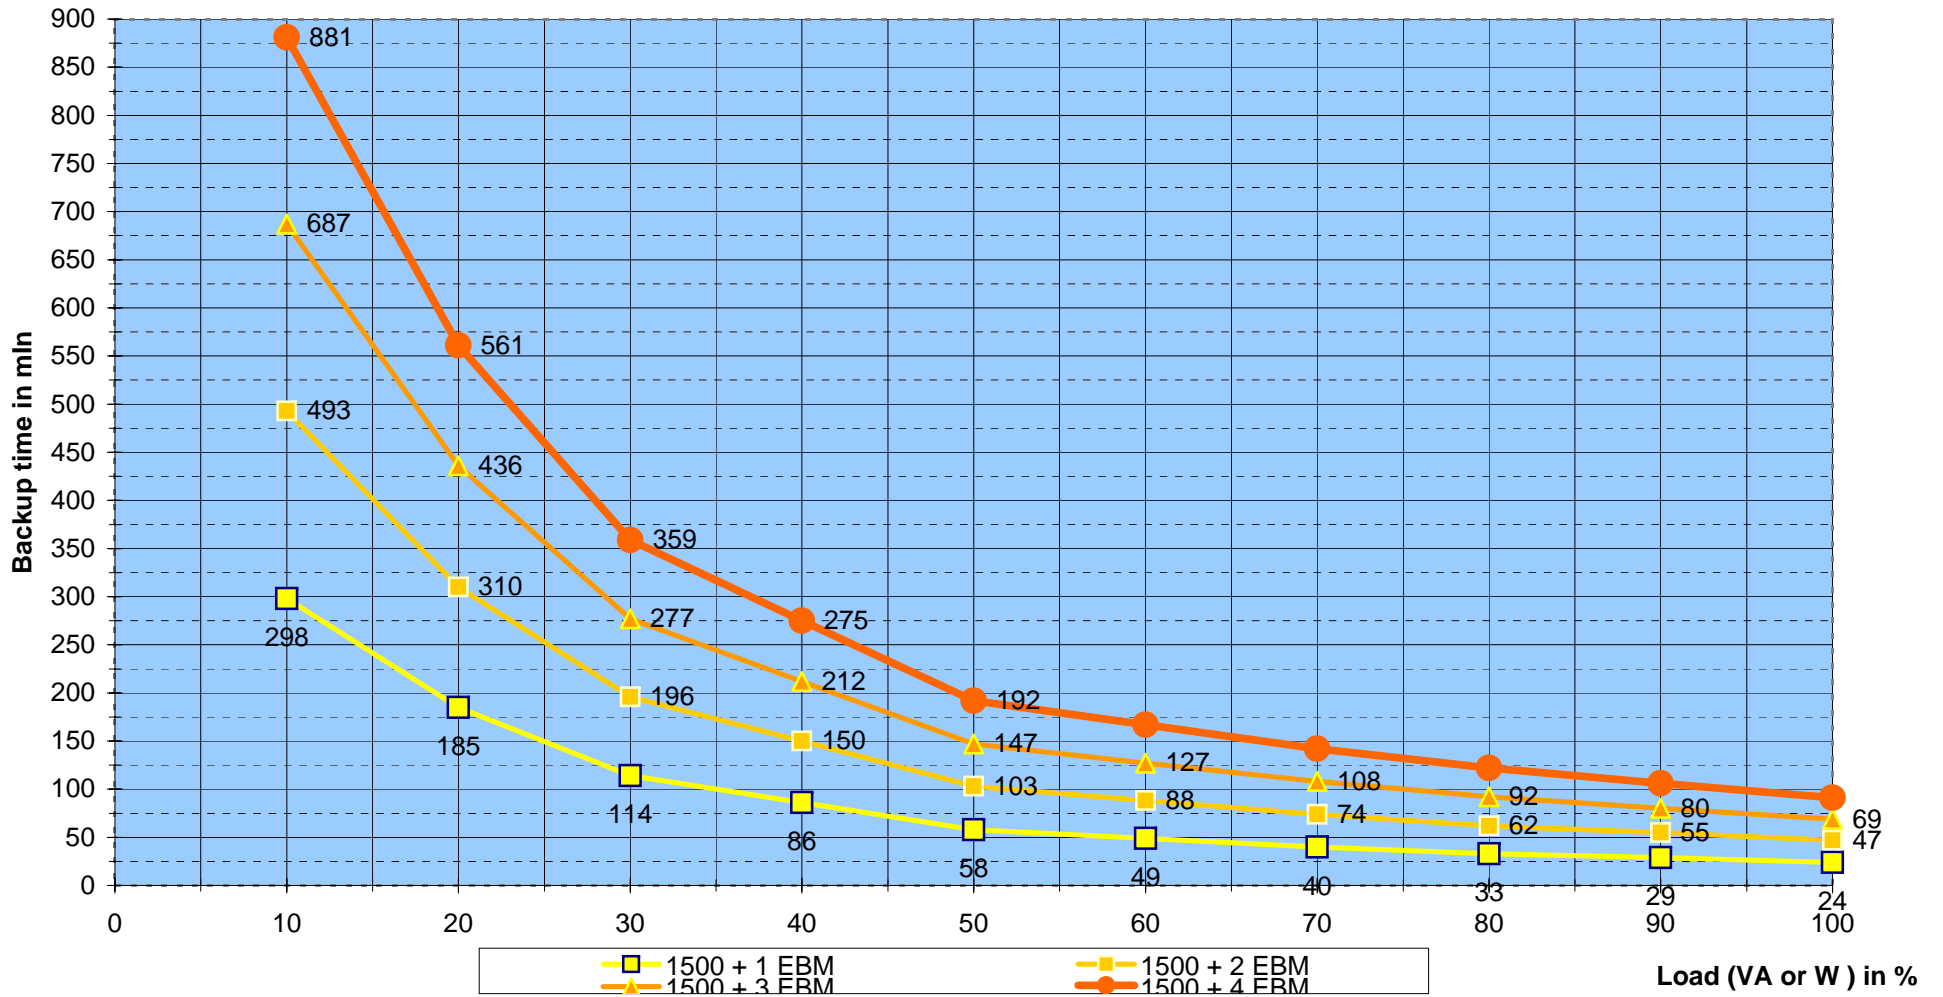


actual runtime may vary from +/- 15% around these typical values

Eaton 5PX 2000 for Pf= 0,9 loads (100% = 2000 VA / 1800 W)

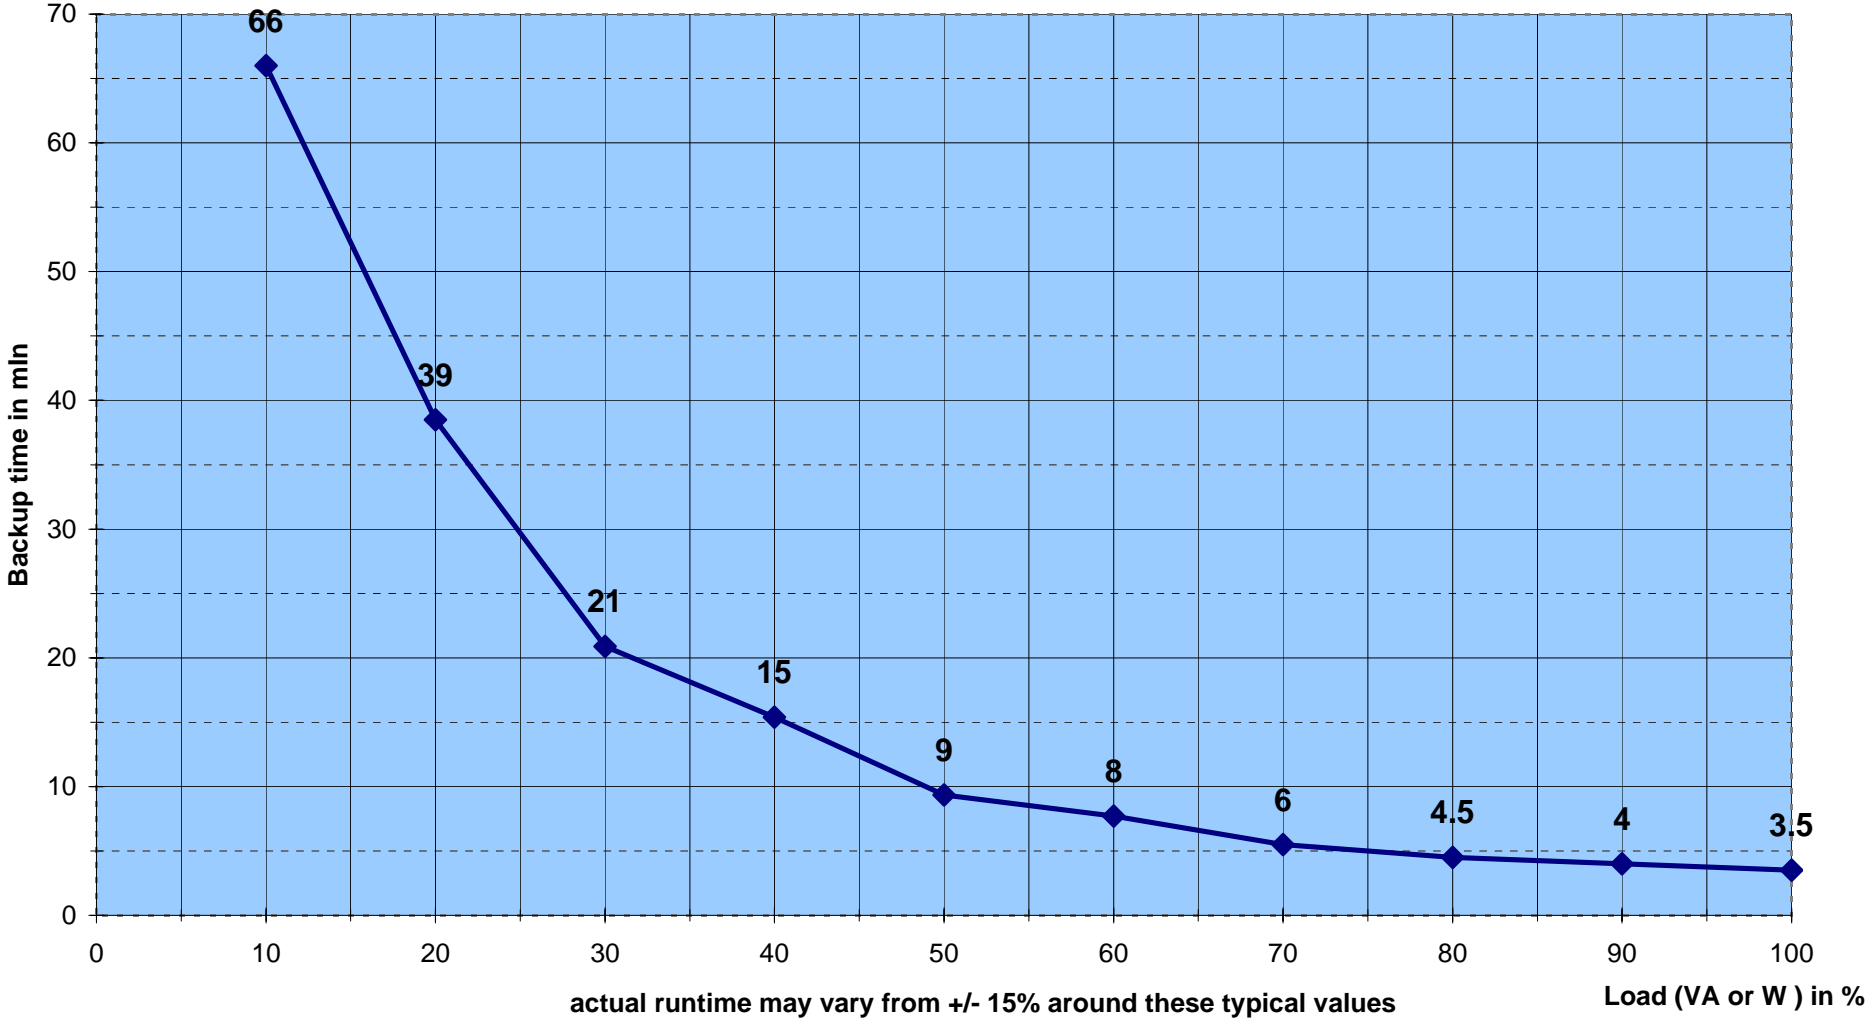


### Eaton 5PX 2000 + EBM for Pf= 0,9 loads (100% = 2000 VA / 1800 W)

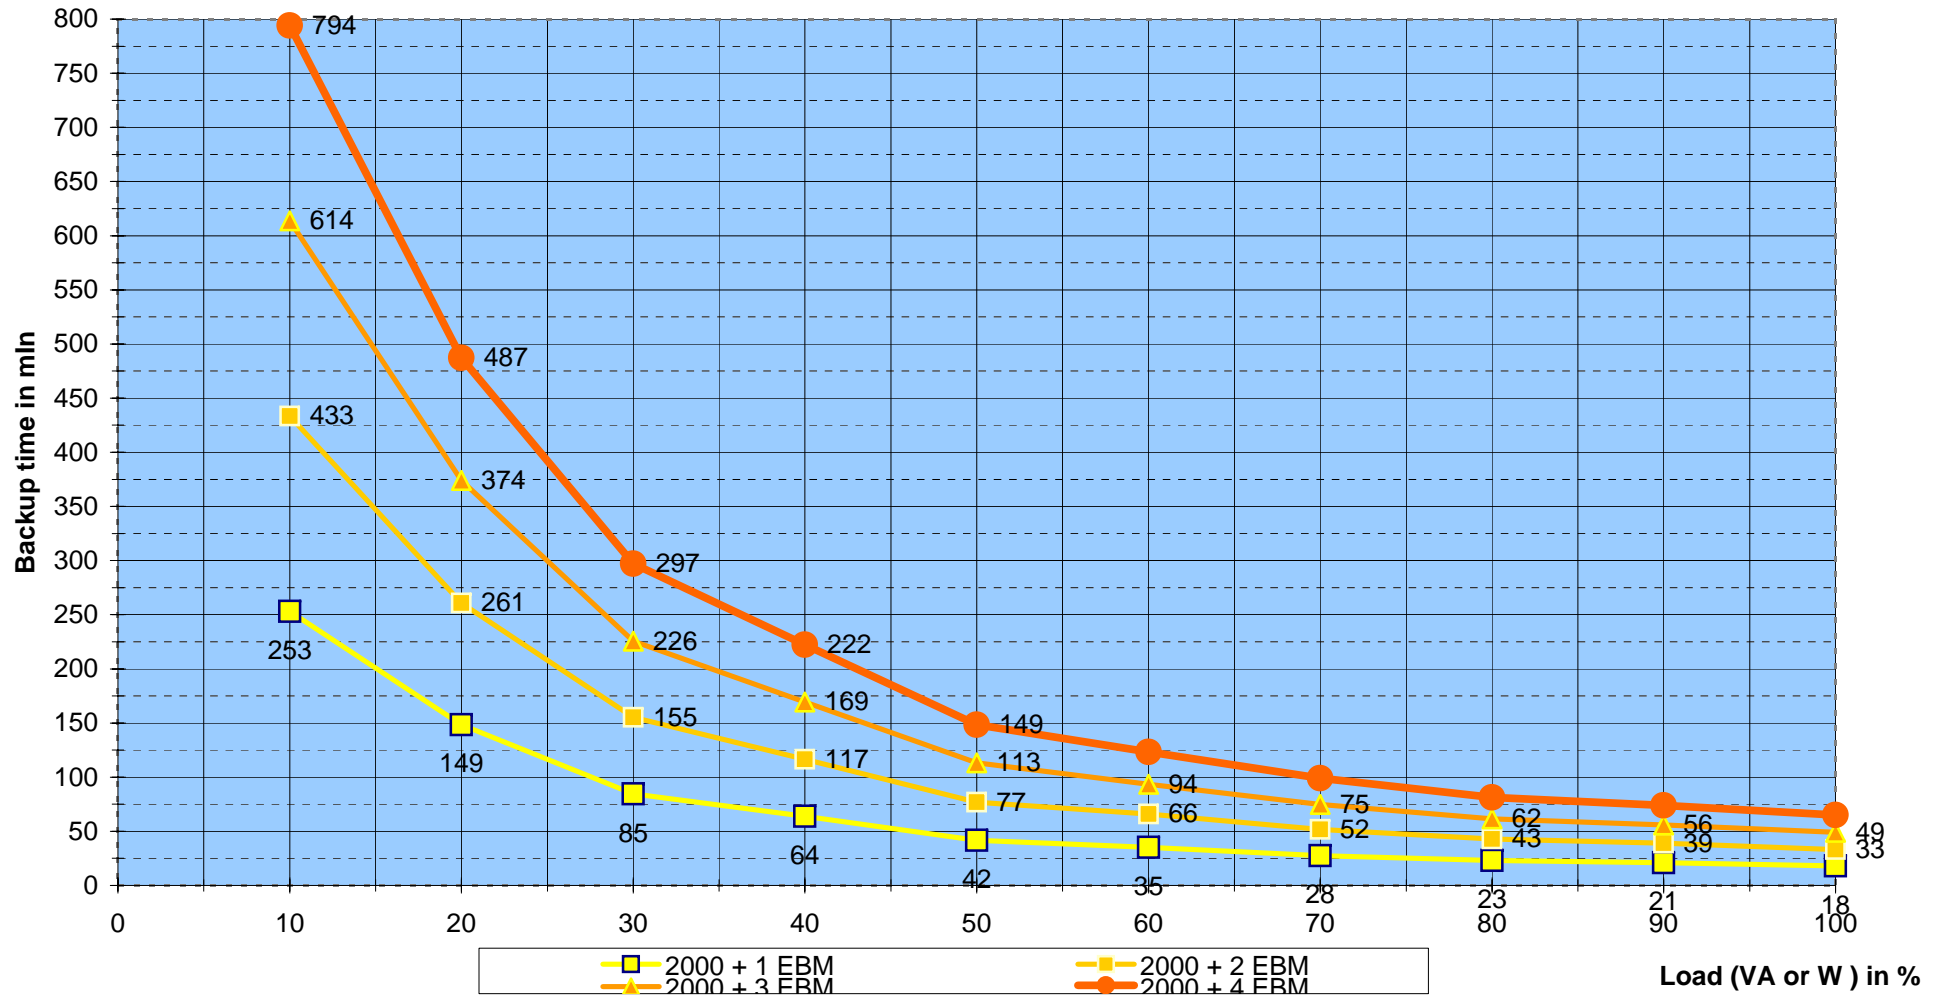


actual runtime may vary from +/- 15% around these typical values

Eaton 5PX 2200 for Pf= 0,9 loads (100% = 2200 VA / 1980 W)

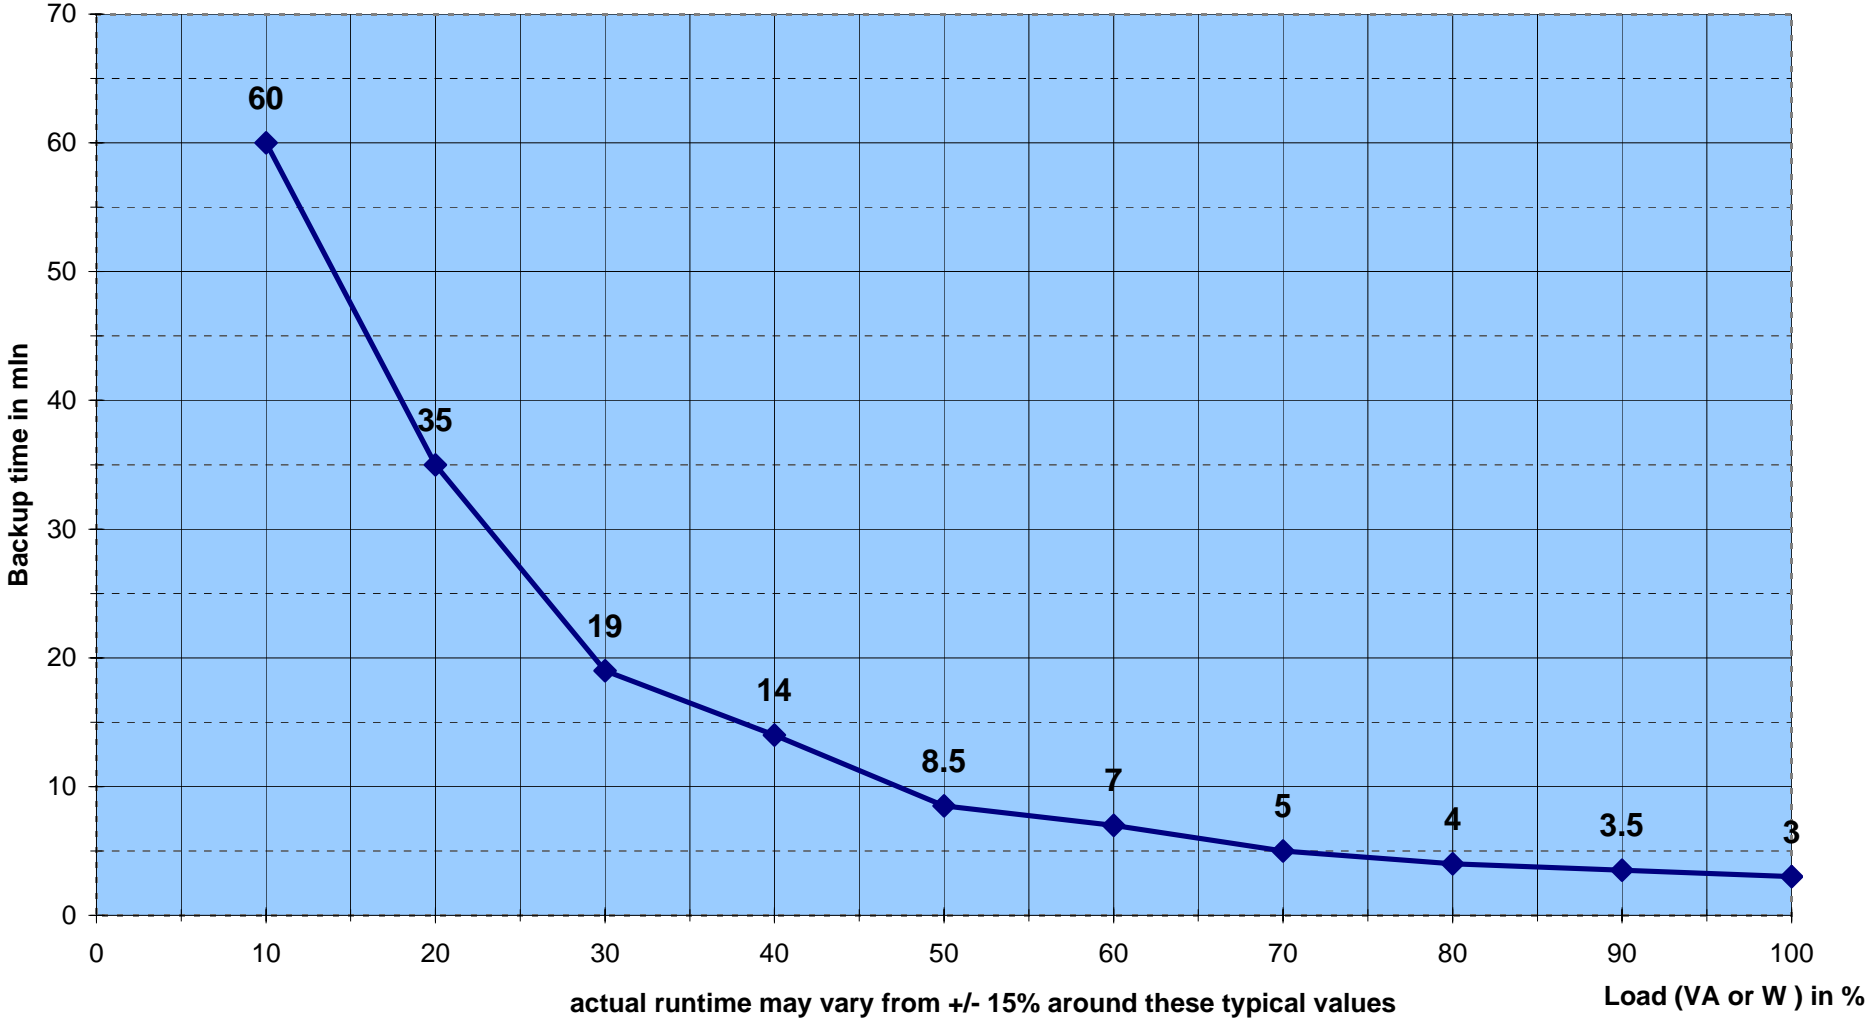


Eaton 5PX 2200 + EBM for Pf= 0,9 loads (100% = 2200 VA / 1980 W)

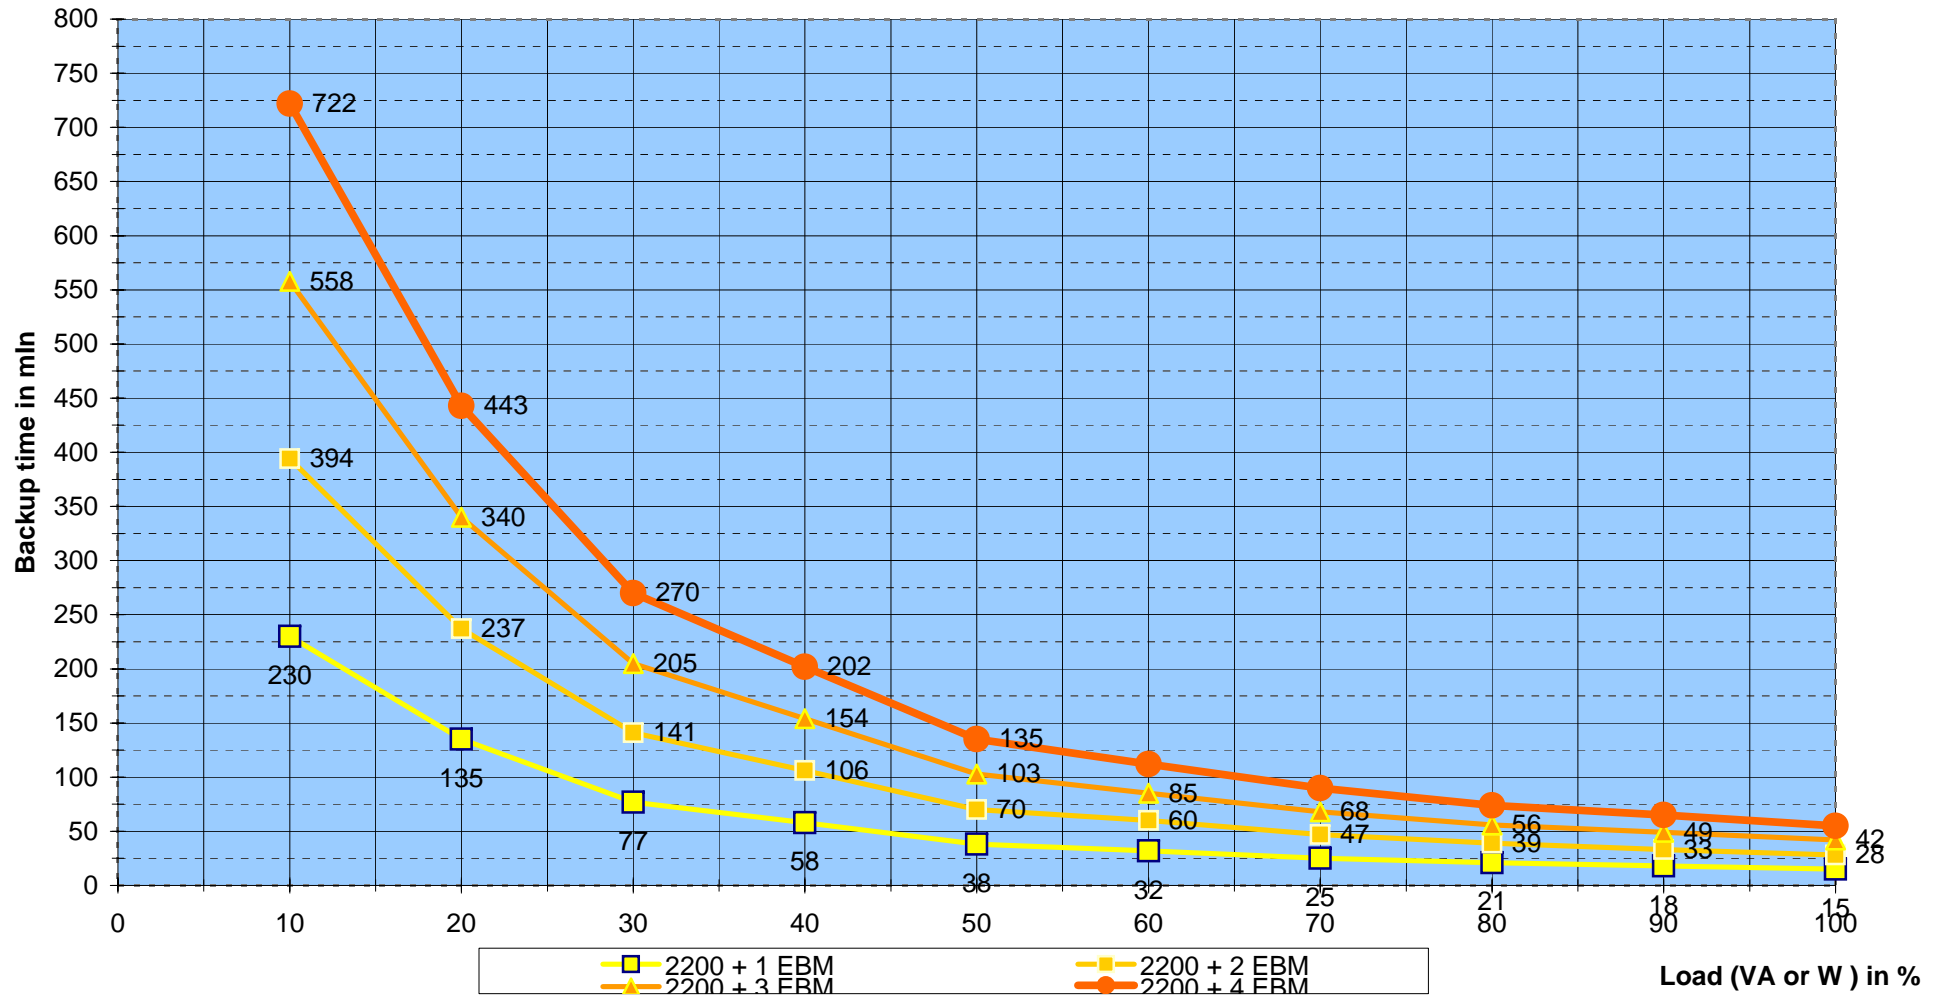


actual runtime may vary from +/- 15% around these typical values

Eaton 5PX 3000 for Pf= 0,9 loads (100% = 3000 VA / 2700 W)

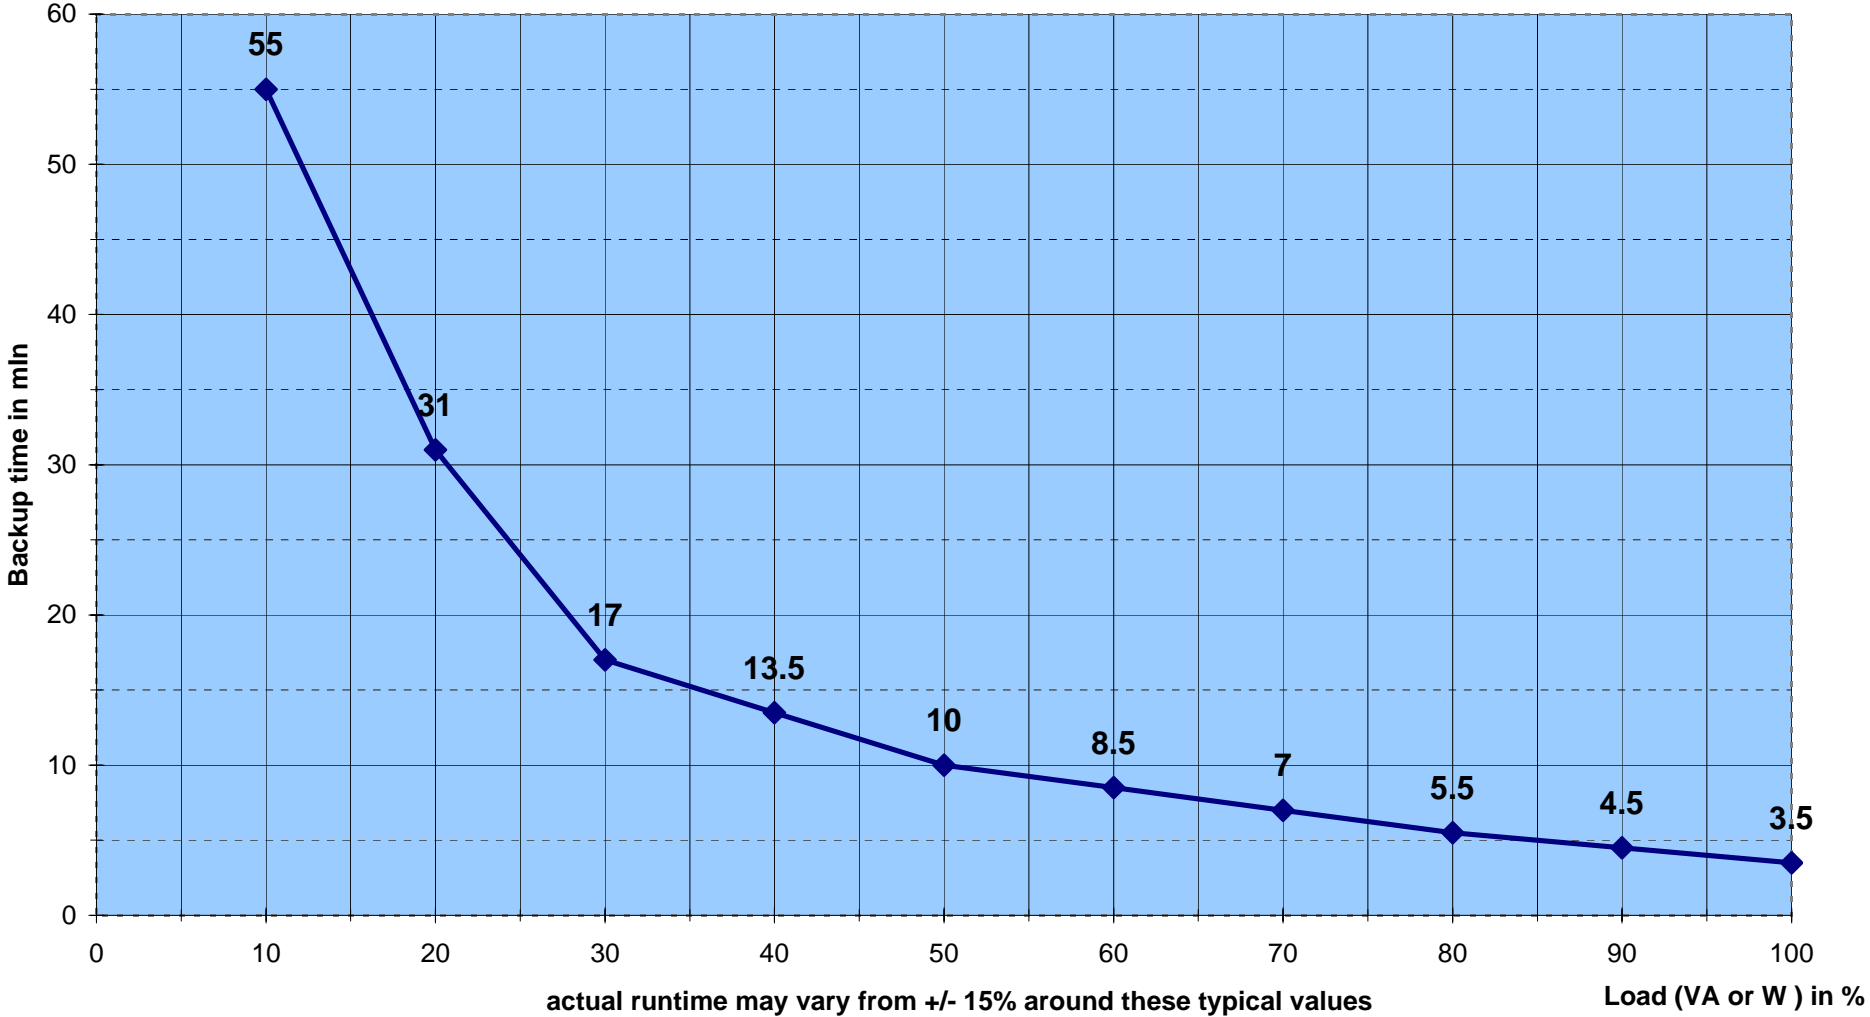

Eaton 5PX 3000 + EBM for Pf= 0,9 loads (100% = 3000 VA / 2700 W)

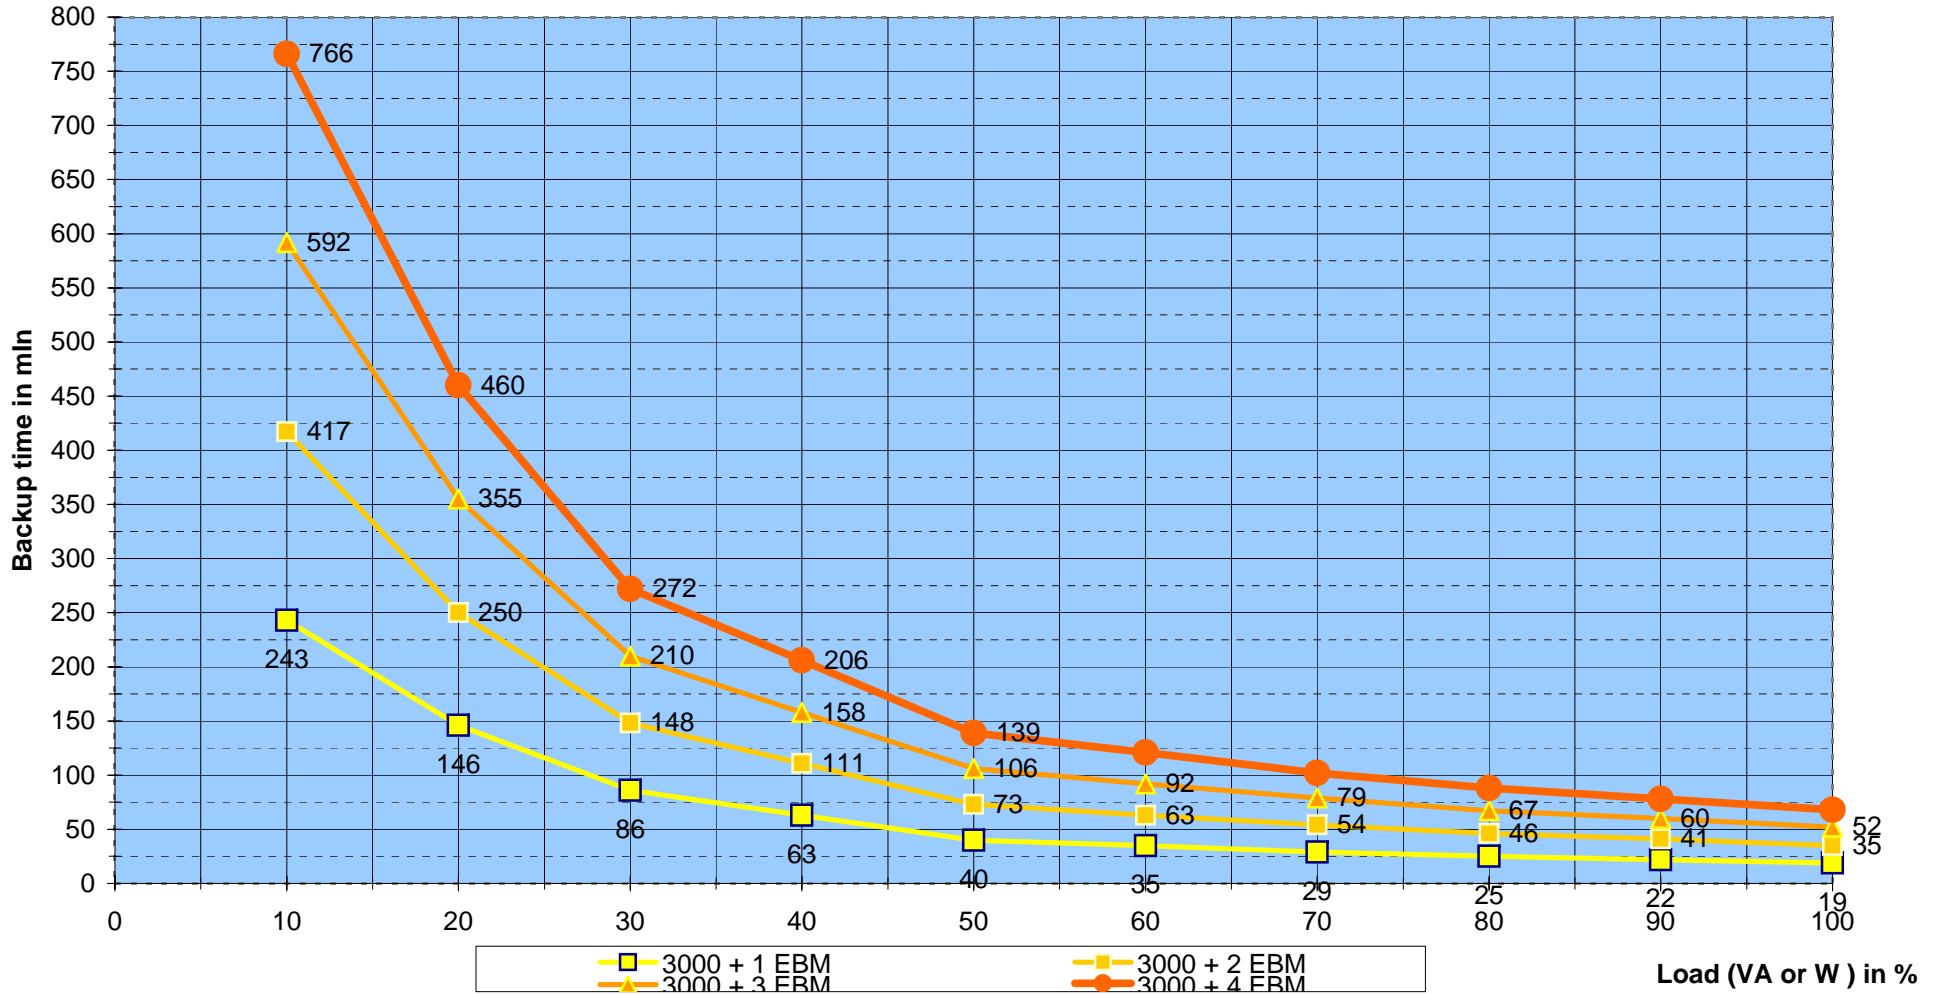

actual runtime may vary from +/- 15% around these typical values